

75DT1560

P-CAP




75DT1560




Optional stand

Features

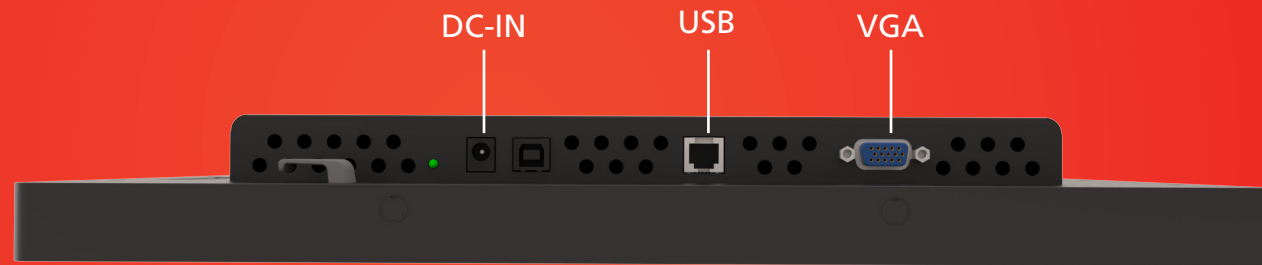

VESA 100x100 mount or bracket mount

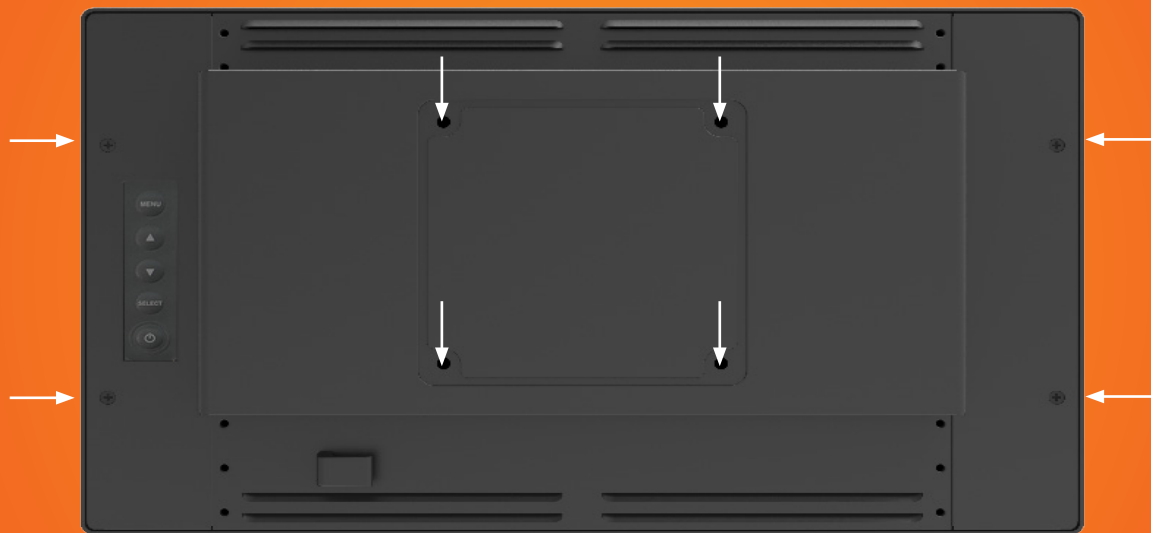

Widescreen



Specification

Model	75DT1560
Size	15.6" TFT LCD
Maximum Resolution	1366 X 768
Contrast Ratio	500:1
Brightness (Backlight Type)	400 nits (No Touch), 360 nits (Projected Capacitive)
View Angle	H:170°, V:160°
Touch LCD Display	
Touch Screen	Projected Capacitive
Touch Points	10
Touch Screen Interface	USB-HID (Type B)
IO ports	
Serial Port	-
USB Port	1 x USB 2.0 (Type B) for Touch Interface (USB-HID)
Video Port	1 x VGA, 1 x HDMI, 1 x DP
Audio Port	
Power Input	1 x 2.1 mm 12V DC Jack
Physical Properties	
Power Supply	50 W (12V / 4.16A) External Power Adaptor
Speaker	NA
Housing Color	Black
Construction	Glass, SECC Metal
Compliance	IP54 Compliant Front Side, IPX1
Dimensions (W x H x D) mm	381.0 x 285.3 x 202.0 mm (With Stand), 381.0 x 230.3 x 46.0 mm (Without Stand)
Net Weight (kg)	4.3 kg
Gross Weight (kg)	6.6 kg
Carton (W x H x D) mm	365.0 x 455.0 x 290.0 mm
VESA	100 x 100 mm
Safety	
Certifications	CE(B), FCC(B), RCM, cUL, UL, TUV, RoHS
Environment	
Operating Temperature	0°C ~ 40°C, 20% ~ 80% RH. Non-Condensing
Storage Temperature	-20°C ~ 60°C, 10% ~ 90% RH. Non-Condensing